

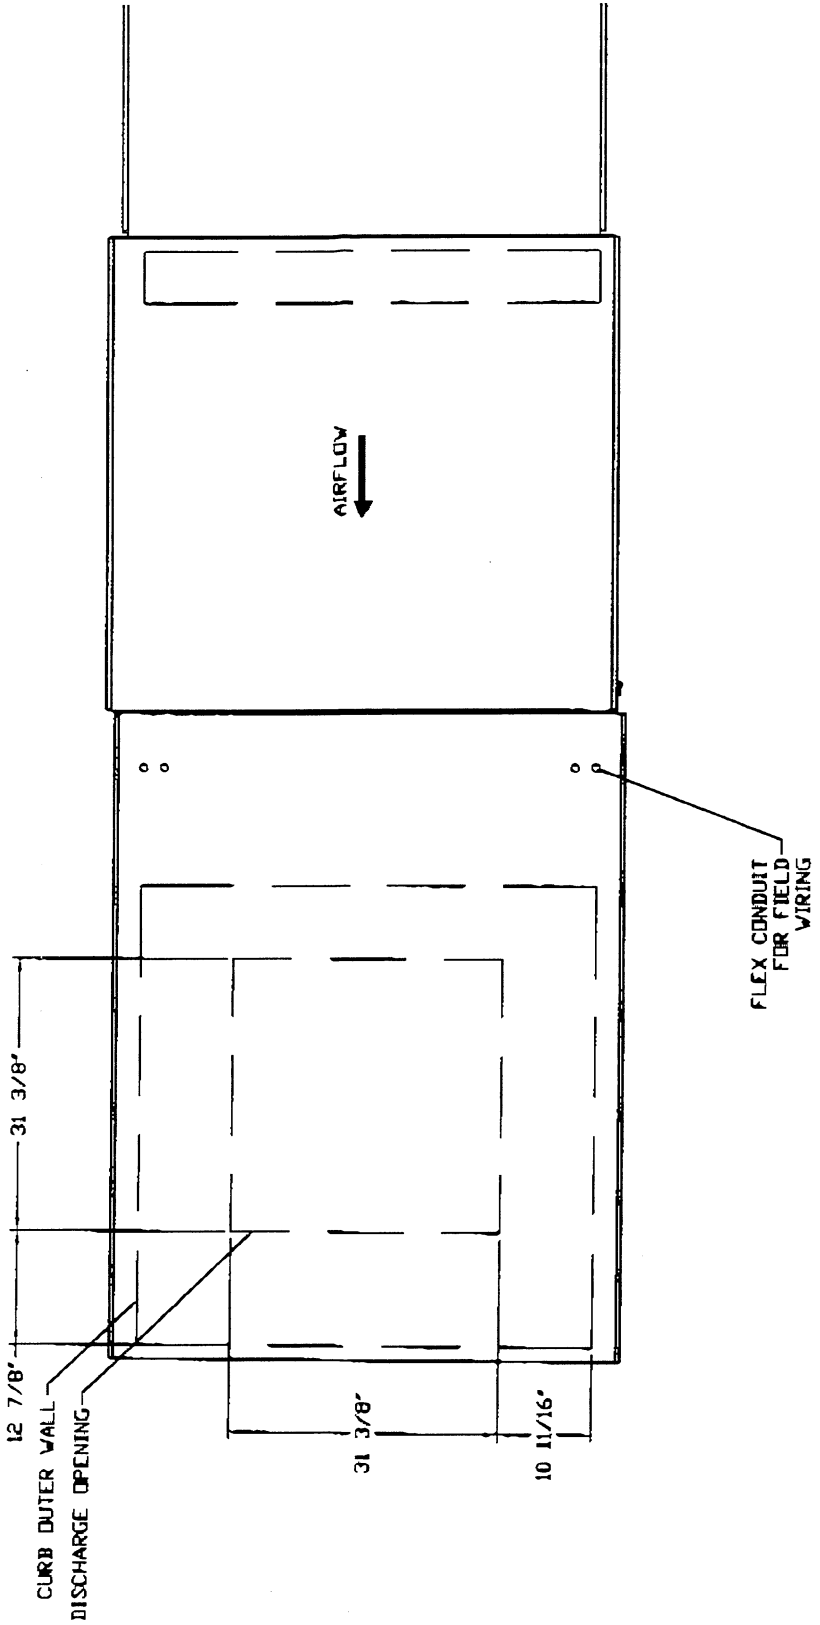


- FAN #1 K-A5-D.2000-925 - HEATER
- 1. DIRECT GAS FIRED HEATED MAKE UP AIR UNIT WITH 25" BLOWER AND 48" BURNER
- 2. INTAKE HOOD WITH EZ FILTERS
- 3. TOP DISCHARGE - AIR FLOW RIGHT -> LEFT
- 4. GAS PRESSURE GAUGE, -5 TO +15 INCHES WC., 2.5" DIAMETER, 1/4" THREAD SIZE
- 5. LOW FIRE START. ALLOWS THE BURNER CIRCUIT TO ENERGIZE WHEN THE MODULATION CONTROL IS IN A LOW FIRE POSITION.
- 6. PILOT LOCATED UPSTREAM OF FIRST REDUNDANT SOLENOID VALVE
- 7. MOTORIZED BACK DRAFT DAMPER 43" X 43" FOR SIZE 5 STANDARD & MODULAR DIRECT FIRED HEATERS W/EXTENDED SHAFT, STANDARD GALVANIZED CONSTRUCTION, 3/4" REAR FLANGE, AF120S ACTUATOR INCLUDED
- 8. FREEZESTAT WITH 10' SENSOR. FACTORY SET AT 35°F AND 10 MINUTES
- 9. VAV (VARIABLE-AIR-VOLUME) WIRING PACKAGE FOR COMMERCIAL FANS WITH FREQUENCY DRIVE. PRESET SPEED VARIABLE FREQUENCY DRIVE INPUT FIELD WIRED


CURB ASSEMBLIES

NO.	DN FAN	ITEM
1	# 1	Curb
		52.750"W x 5
	# 1	Roll
		6.000"W x 5

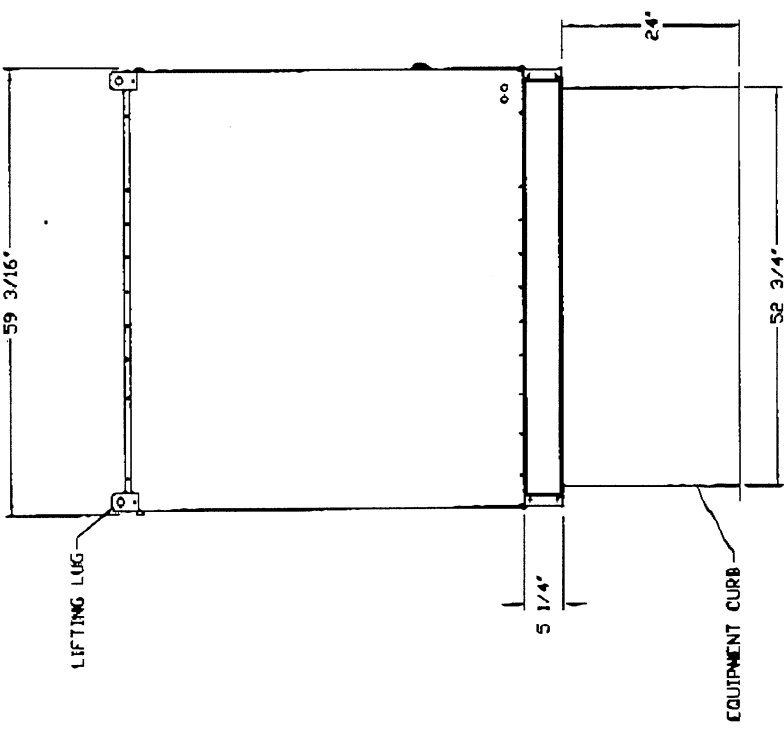

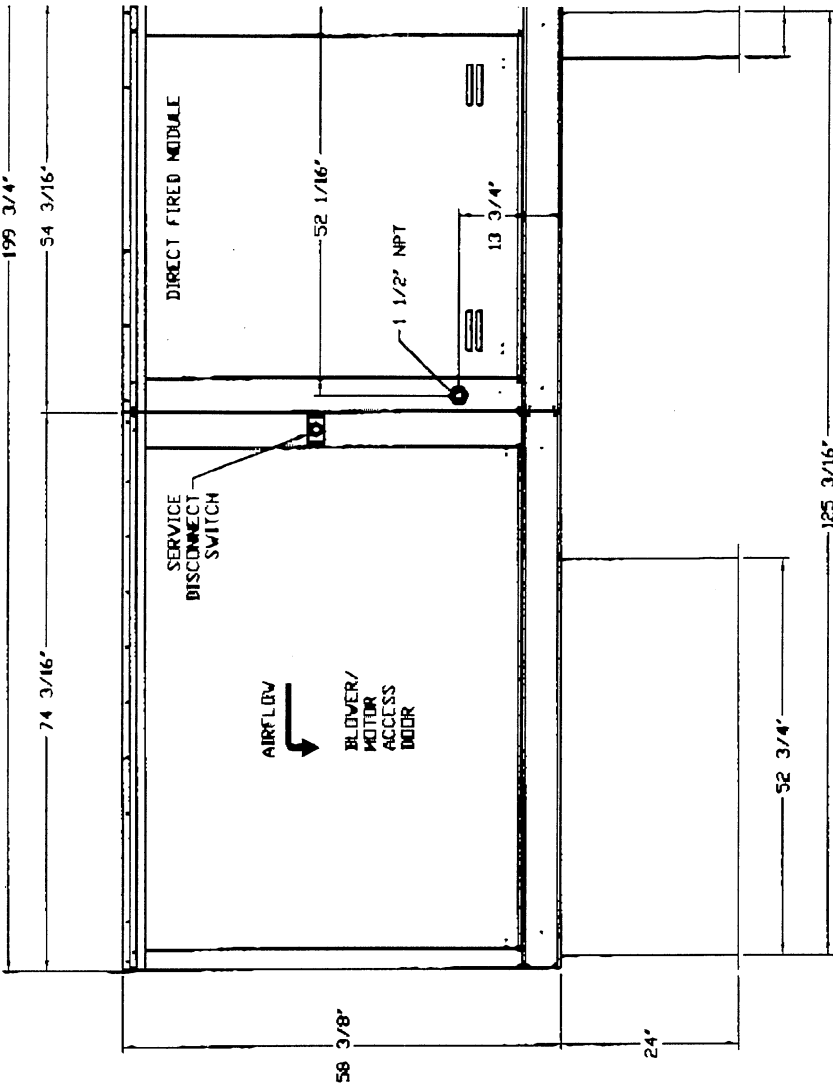

SIZE
2.750"L x 24.000"H Insulated
2.750"L x 24.000"H Along Width,

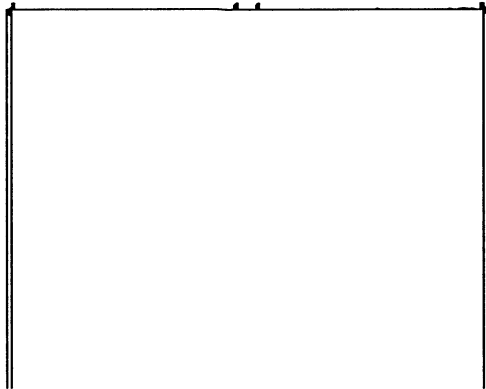


WITH 25" BLOWER AND 48" BURNER

2.5" DIAMETER, 1/4" THREAD SIZE
FIT TO ENERGIZE WHEN THE MODULATION CONTROL IS

AT SOLENOID VALVE
R SIZE 5, STANDARD & MODULAR DIRECT FIRED
IZED CONSTRUCTION, 3/4" REAR FLANGE, AF120S

AT 35°F AND 10 MINUTES.
E FOR COMMERCIAL FANS WITH FREQUENCY DRIVE.
JT FIELD WIRE

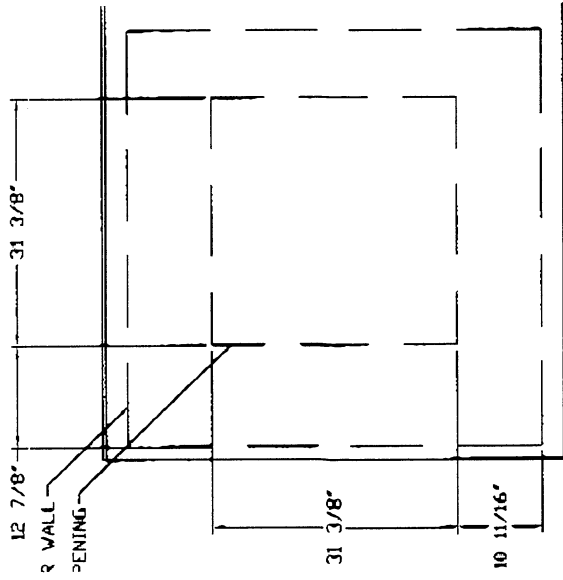

FLEX CONDUIT
FOR FIELD
WIRING