

combination machine

minimax c 26g

combination machine



*Photo may include optional equipment

Minimax C 26G T

Combination machine with 10" Tersa Cutterhead

Universal combination machine with all of the Minimax quality at a more affordable price, ideal for the D.I.Y. woodworkers and the small joinery workshops. The most compact 4-in-1 combination machine available, the Minimax C 26G T is ideal for the hobbyist who works primarily with solid wood and is looking for a better alternative to tools like a jobsite saw, benchtop lunchbox jointer, benchtop planer, and router table. The Minimax C 26G T comes standard with 2.5hp motors, 10" sawblade capacity, 2-speed shaper, 10" Tersa jointer planer cutterhead, and mobility kit.



STANDARD EQUIPMENT

- 4ft Sliding table saw with 10" main blade
- 3x 2.5 Horsepower single-phase motors
- 10" Jointer/Planer Cutterhead with Tersa knives
- Anodized aluminum sliding table with hardened steel ways
- Eccentric workpiece clamp
- Adjustable and removable riving knife
- Outtrigger/Squaring frame included (not pictured)
- Tool set and operator's manual

TECHNICAL SPECIFICATIONS

| Table Saw | |
|-------------------------------------------|---------------------------------|
| 3x Single-Phase Motors (230V) | 2.5 Hp |
| Squaring Stroke | 48" (1220mm) |
| Main Blade Diameter | 10" (254mm) |
| Main Blade Arbor Size | 5/8" |
| Blade Tilt | 90° - 45° |
| Ripping Capacity, right side of saw blade | 20" |
| Maximum Depth of Cut at 90° | 3.25" (82mm) |
| Jointer/Planer | |
| Jointer Cutterhead | 10" (254mm) |
| Jointer Table Size | 10.25" x 41" (260mm x 1041mm) |
| Maximum Stock Removal | 1/8" |
| Fence Tilt | 90° - 45° |
| Planer Table Size | 10.25" x 17.75" (260mm x 450mm) |
| Min/Max Planer Material Thickness | 1/8" / 6" |
| Feed Speed | 19.7 fpm |
| Shaper | |
| Spindle Working Length | 3" |
| Spindle Diameter | 1.25" |
| Spindle Speed(s) | 4,000 & 6,500 rpm |
| Max. Tool Diameter (under table) | 6" |
| Max. Tool Diameter (above table) | 8.25" |

Dimensions (mm)

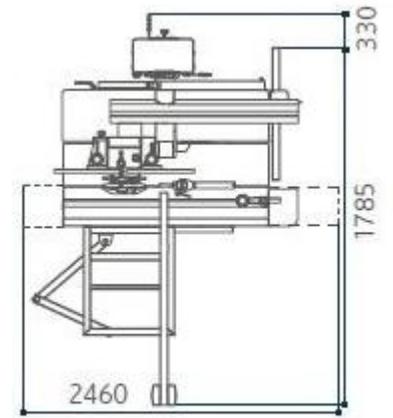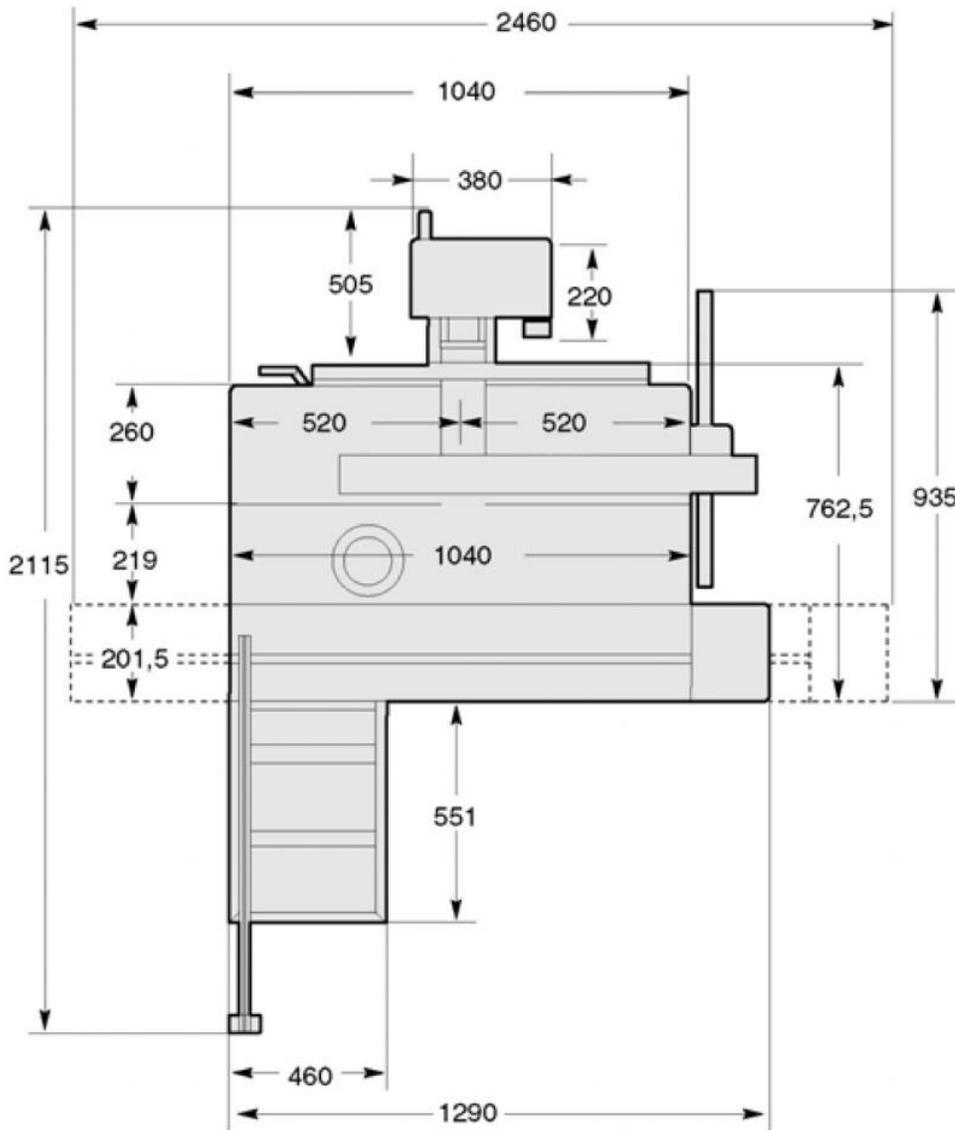

with support frame

| | Minimax C 26G Universal Combination Machine w/ 1.25" arbor |
|----------|-------------------------------------------------------------------|
| R7.01.73 | Minimax C 26G Usa/Canada version |
| 93.07.51 | 220 volt |
| 93.12.15 | Frequency 60Hz |
| 58.01.91 | Squaring frame |
| 58.01.96 | 3 Single-phase motors 2.5Hp (1,8kW) |
| 58.03.38 | Wheels for movement |
| 58.01.95 | "Tersa" cutterblock Ø 62mm with knives with rapid locking system |
| 13.13.25 | Spindle moulder shaft of 1 ¼" |
| 21.13.19 | Locking by countersunk socket screw |
| 08.06.23 | Triple wall |

Specifications are subject to change



*Euroguard not included, American guard standard for US

