

Kundig Uniq S Edgesander



Quote prepared for:

List of contents

	Page	
1. Kundig Uniq - S	3	
1.1 CAPABILITIES	3	
1.2 STANDARD EQUIPMENT	3	
2. TECHNICAL DATA	6	
4. HOLZ-HER TERMS AND CONDITIONS	6 -	8
3. PRICE PAGE	9	

1. Kundig Uniq-S Throughfeed Edge

Sander

The Perfect Edge Sander for Professional Woodworkers, Furniture and Architectural Firms.
Compact footprint with Multiple Functions.

1.1 CAPABILITIES

- Sands solid wood and veneered edges, with jointing capabilities
- Sand Sealer by adding optional variable speed abrasive, belt cleaner and jump pad

Initials _____




- Sand Compound Miters, Bevels, and Angles
- Contoured parts and interior holes can be sanded using *optional* spindles / tables
- Two working tables at different heights (36" & 33") lets two operators work simultaneously
- Sanding unit pivots, producing complimentary angles between the two fixed height tables
- 90° to 45° Pivot range, by electric motor
- Sanding unit angle indicator
- Head electrically positioned up and down to 5" for full width belt usage
- Oscillating Abrasive Belt range programmable from 0.4" to 3.5"

1.2 STANDARD EQUIPMENT

- **Solid sanding side** uses graphite covered 32" x 8" solid platen
 - Miter gauge with scale for angles, miters, or compound miters
- **Jointing side**
- Adjustable infeed fence with dust extraction slots
 - Infeed fence is adjustable for controlled stock removal
 - Scale indicates amount of stock removal
 - Grit compensation adjusts pad for different grit abrasive belts

 - Programmable Oscillating sanding unit, with 0.4" to 4.7" standard oscillation
 - Sanding Head angles to 45° by electric motor
 - Simple Belt tracking
 - Quick Belt Release
 - Dust Collection Ports for all sanding units
 - 1 Box of 15 sanding belts, w/ 5 ea. 100, 120, 150 grit (or per customer request)

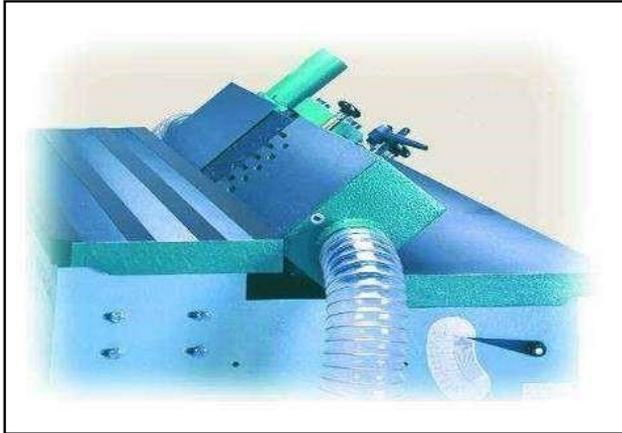

Jointing Side angled to 45°



Uniq Flat Platen Side

KUNDIG UNIQ S: *Conveyor Fed Edgesanding*

- Includes **FEED BELT** built into jointing side table for consistent sanding.
- Variable Feed Speed from 9 to 45 fpm, Inverter Controlled
- Hold down w/ 5 rollers adjustable to 10.25" □ Locking height position for hold down unit.
- Extended Infeed Support




UNIQ S

KUNDIG UNIQ S 2:

- Designed to hold narrow or small parts more securely than Uniq S
- **TWO** Driven Feed Belts transport parts more securely □ 5 ea. Adjustable position Feed Rollers in upper assembly
- Feed Roller assembly opens to 10.25", Lockable.

Minimum part size for END sanding: 3"
Minimum part size for EDGE sanding: 1.2"

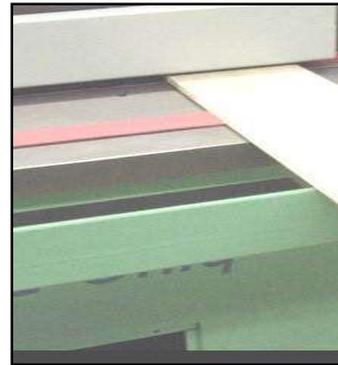

- Fold Down End Table for sanding w/ 3.5" OD Drive Roller:
- Oscillating Spindle Sander equipment, Includes:
 - 4 rubber sleeves and 4 abrasives to mount on extended Drive Roll
 - 1", 1.2", 1.6", 1.75" Ø x 4" L
 - Removable 16" x 20" Aluminum Table,
 - Includes storage post when table is not in use
 - Includes dust extraction port and flex duct



2. TECHNICAL DATA

- Drive Motor 4 HP, 3 Ph, 220 V.
- Full Load Amps @ 220 V: 15 A.
- Rubber Covered Drive Roll
- Magnetic starter w/ overload protection
- Dust collection outlet: 5.9"
- Dust Collection Requirement @ 4500 FPM velocity: 885 CFM
- Working Heights: 36" on Jointing (veneer) Side
33" on Flat Platen Side

- Standard Oscillation programmable from: 4" to 3.5"
- Sanding Unit Pivot from support table: 90° to 45°
- Compressed Air: NONE
- Footprint: 31.5" x 45"
- Net weight, Uniq S: 1180 lbs.

3. INVESTMENT:

Kundig UNIQ S	\$ 32,500
Package Price	\$ 29,750
_____	_____
Offer Accepted by/Title	Date

ADDITIONAL OPTIONS: